



## Lexmark MC3426i

Productivity. Reliability. Security.



# Lexmark MC3426i

Small workgroup color versatility is easy to deploy and share with the compact, lightweight Lexmark MC3426i multifunction. It combines printing at up to 26 ppm\* with automatic scanning at up to 96 images per minute plus copying and available cloud faxing\*\*. Take control with a 2.8-inch (7.2 cm) touch screen and connect via Wi-Fi and more.

## Compact color versatility

- ▶ Get rich, vibrant color output or copies at up to 26 pages per minute\*, plus automatic two-sided scanning at up to 96 images per minute.
- ▶ Tackle your workload with the power of a 1-GHz dual-core processor and 1 GB of memory.
- ▶ Compact dimensions of 13.6 inches high x 16.2 inches wide x 15.5 inches deep (344.4 mm high x 411.2 mm wide x 394.1 mm deep) help it fit almost anywhere.
- ▶ Available cloud fax\*\* provides additional document sending and receiving options.



## Connect and command

- ▶ Connect via Wi-Fi, Gigabit Ethernet, or USB.
- ▶ Simplify mobile printing with the Lexmark Mobile Print app, Mopria®, and AirPrint.
- ▶ Take command of device settings and monitor vital system functions on a 2.8-inch (7.2 cm) color touch screen.
- ▶ Built-in cloud connectors let you securely save scans to and

retrieve files from popular cloud services Box, DropBox, Google Drive, and Microsoft OneDrive.

## Sustained output, enduring quality

- ▶ Genuine Unison™ replacement toner offers rich, vibrant color in available Extra High Yield cartridges that provide up to 4,500 pages of output\*\*\* for more printing and less downtime.
- ▶ Single-piece cartridge simplifies supply replacement for fewer interruptions.
- ▶ Optional input trays increase total input capacity to 751 sheets to support longer print runs and enhanced media flexibility.
- ▶ A steel frame and lifetime imaging components mean long life and minimal maintenance.

## Robust, built-in security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device, over the network, and everywhere in between.

## Save paper, save energy


- ▶ Automatic two-sided printing is standard.
- ▶ Built-in energy-saving modes help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The Lexmark Cartridge Collection Program (LCCP) and Lexmark Equipment Collection Program (LECP) minimize waste and support recycling (availability varies by country).

\* Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\* Subject to subscription with etherFAX®. A trial package (up to 3 months or 300 pages, whichever comes first) is included free of subscription charge; other fees, such as telecommunication charges, may apply. Contact etherFAX ([www.etherfax.net](http://www.etherfax.net)) for details. Trial may be withdrawn without notice. Service may not be available in all locations. Analog faxing via phone line is not supported by this device.

\*\*\* Average continuous black or continuous composite color (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See [www.lexmark.com/yields](http://www.lexmark.com/yields) for more information.

## Lexmark MC3426i

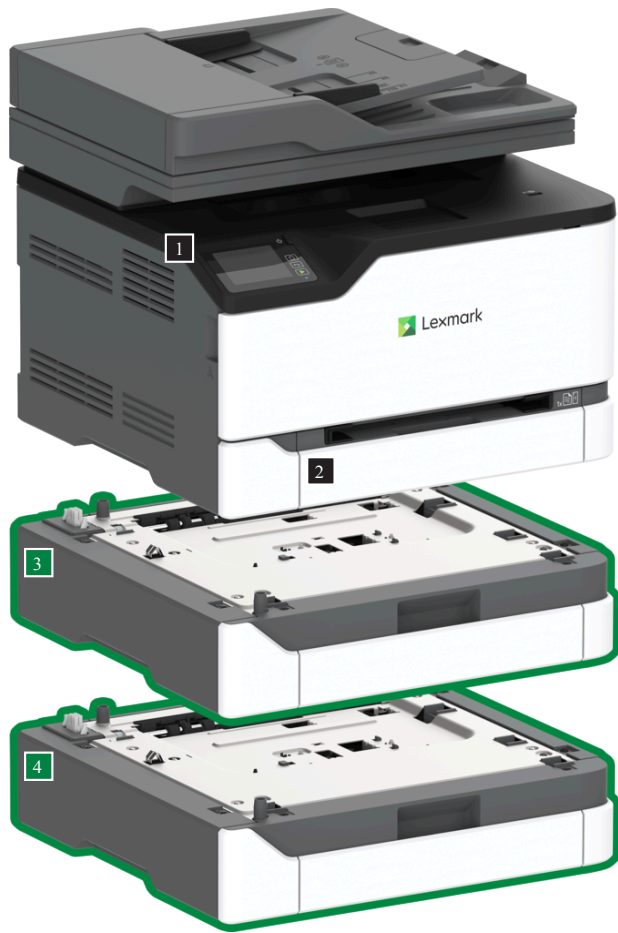

- 1 Multifunction product with 2.8-inch (7.2 cm) touch screen  
13.6 x 16.2 x 15.5 in.  
344.4 x 411.2 x 394.1 mm

- 2 250-Sheet tray  
Dimensions included as part of base model

- 3 250-Sheet Tray  
4.1 x 16.2 x 15.0 in.  
103.9 x 411.2 x 381.0 mm

- 4 250-Sheet Tray  
4.1 x 16.2 x 15.0 in.  
103.9 x 411.2 x 381.0 mm



Supports up to two optional 250-sheet trays.

All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)

Product Specifications		Lexmark MC3426i
Printing		
Display	2.8 inch (7.2 cm) Color touch screen	
Print Speed	Up to: Black: 26 ppm <sup>1</sup> (Letter) / Color: 26 ppm <sup>1</sup> (Letter)	
Time to First Page	As fast as: Black: 10.8 seconds / Color: 11 seconds	
Print Resolution	Black: 4800 CQ (2400 x 600 dpi) / Color: 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 1 GB / Maximum: 1 GB / Standard: 1024 MB / Maximum: 1024 MB	
Hard Disk	Not Available	
Recommended Monthly Page Volume	750 - 5000 pages <sup>2</sup>	
Maximum Monthly Duty Cycle	Up to: 75000 pages per month <sup>3</sup>	
Copying		
Copy Speed	Up to: Black: 26 cpm <sup>1</sup> (Letter) / Color: 26 cpm <sup>1</sup> (Letter)	
Time to First Copy	As fast as: Black: 13.1 seconds / Color: 13.1 seconds	
Scanning		
Scanner Type / ADF Scan	Flatbed scanner with automatic document feeder / Automatic single-pass 2-sided document feeder	
A4/Ltr Duplex Scan Speed	Up to: Black: 90 / 96 sides per minute / Color: 40 / 42 sides per minute	
A4/Ltr Simplex Scan Speed	Up to: Black: 45 / 48 sides per minute / Color: 20 / 21 sides per minute	
ADF Paper Input Capacity	Up to: 50 pages 20 lb or 75 gsm bond	
Supplies <sup>4</sup>		
Laser Cartridge Yields	up to: 4,500 <sup>5</sup> -page Black and Color (CMYK) Extra High Yield Cartridges / up to: 1,500 <sup>5</sup> -page Black and Color (CMYK) Cartridges	
Cartridge(s) Shipping with Product	1,500 <sup>5</sup> -page Black Return Program Toner Cartridge <sup>5</sup> , 1,500 <sup>5</sup> -page Color (CMY) Return Program Toner Cartridges <sup>5</sup>	
Paper Handling		
Included Paper Handling	100-Sheet Output Bin, Single-Sheet Manual Feed, Automatic 2-sided printing, 250-Sheet Input	
Paper Input Capacity	Up to: Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 750+1 pages 20 lb or 75 gsm bond	
Paper Output Capacity	Up to: Standard: 100 pages 20 lb or 75 gsm bond / Maximum: 100 pages 20 lb or 75 gsm bond	
Media Types Supported	Hagaki Card, Paper Labels, Card Stock, Plain Paper, Glossy Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope	
General Information <sup>6</sup>		
Standard Ports	Front Hi-Speed USB Port Compatible with USB 2.0 Specification (Type A), 802.11b/g/n Wireless, USB 2.0 Specification Hi-Speed Certified (Type B), Ethernet 10/100/1000 BaseTX (RJ-45)	
Noise Level	Operating: 51/52 dBA (Print) / 50 dBA (Copy) / 44 dBA (Scan)	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 3048 Meters (10,000 Feet) / Temperature: 10 to 32°C (50 to 90°F)	
Limited Warranty	See Statement of Limited Warranty: 1-year Onsite Repair, Next Business Day	
Size / Weight	H x W x D: 13.6 x 16.2 x 15.5 in. / 42.7 lb.	
ENERGY STAR Typical Electricity Consumption	TEC: 0.37 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average continuous cartridge yield is stated number of standard pages as listed. Declared yield value in accordance with ISO/IEC 19798. <sup>6</sup> Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/](http://www.lexmark.com/) printerlicense for details.

© 2021 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).



[lexmark.com](http://lexmark.com)